


700 Elevation Table

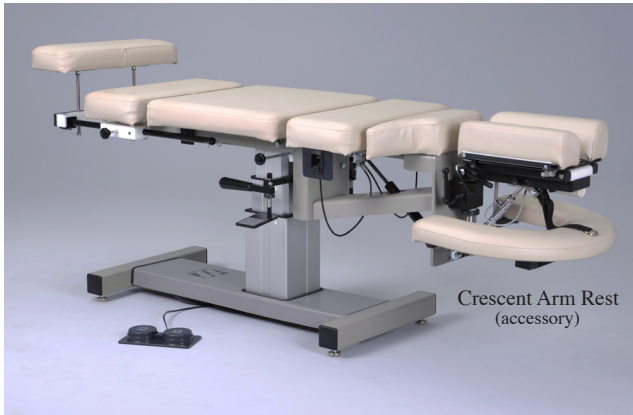

Affectionately referred to at Thuli Tables as the "Big Dipper!" Exclusive to this table, the swing-away abdominal section allows pregnant women to comfortably lie prone again. Also accommodates those of us with a little extra around the middle! The abdominal section swings away and locks into position at any angle. With smooth and quiet vertical height adjustability at the touch of a foot switch, you can optimally position each patient. This is Dr. Thuli's favorite table! Shown with custom color.

\$4000

700 ELEVATION ACCESSORIES

\$ 150	Crescent Arm Rest
150	Comfort Pillow
75	Headpiece Extension
75	Logo

700 ELEVATION FEATURES

Headpiece

- Flexion: 0 -14°, Extension: 0 - 20°
- Vertical Elevation: 0 - 6" (0 -15 cm)
- Straight Drop & Forward Motion Drop: 0.62" (16 mm) drop height, adjustable tension
- Lateral Motion: 0 - 25° right and left
- Compound angle possible, locks into position
- Contoured cushions, 3.25" (8.5 cm) thick: 0.5" (13 mm) soft foam laminated to 2.75" (7 cm) firm foam
- Paper Hanger, Hold-Down & Tear-Off Bar, one roll of headpiece paper (8.5", 22 cm) provided

Prone Arm Rest

- Adjustable position

Thoracic Section

- Fixed, contoured with slight ergonomic incline

Abdominal Section

- 10" x 20" (25 x 51 cm)
- Swings away from 0 - 7" (0 - 18 cm)
- Easily operable from both sides of table
- Locks into position at any angle

Pelvic Section

- 20" x 20" (51 x 51 cm)
- Drop: 0.7" (17.5 mm) drop at front, adjustable tension control knob on one side. Does not incline.

Ankle Rest Section

- 7" x 20" (18 x 51 cm)
- Extension: 0 -10" (0 - 25 cm), adjustable, locks into position
- Elevation: 0 - 6" (0 -15 cm), adjustable

Foot Cocking Pedals & Fold-Away Hand Cocking Levers

- On both sides of table

700 ELEVATION SPECIFICATIONS

Length:	68" (173 cm), extends to 78" (198 cm)
Width:	20" (51 cm)
Height:	Choice of 17.5"- 27.5" (43 - 69 cm) or 19.5"- 29.5" (48 - 74 cm)
Weight:	250 lbs (114 kgs)
Base Construction:	Grey powder-coated metal
Foam:	2.25" (5.7 cm) thick, medium firm, high resiliency
Upholstery:	Topstitched Naugahyde brand vinyl
Colors:	Burgundy, Navy Blue or Black (custom colors available)
Drop Mechanism:	Adjustable compression spring, stainless steel plunger in high density polyethylene housing
Shipping:	Common Carrier
Box sizes:	2 boxes: 56" x 26" x 19" (142 x 66 x 48 cm) and 28" x 23" x 17" (71 x 58 x 43 cm)
Shipping weight:	290 lbs (132 kgs)
Assembly Time:	15 minutes, tools included. Shipped partially disassembled to insure maximum protection in transit and to reduce shipping expense.
Warranty:	1 year

ELECTRIC LIFT MOTOR SPECIFICATIONS

Weight capacity:	900 lbs (409 kgs)
Vertical Travel:	0 -10" (0 - 25 cm), quiet & smooth
Vertical Speed:	Approx. 1" (2.5 cm) per second
Construction:	Swiss-engineered & manufactured, anodized aluminum telescoping columns, worm-gear integrated linear drive
Electrical:	110 volt/10 amp (230 volt available)
Switch:	Electropneumatic foot switch (black)
Electrical Cord:	Hospital-grade cordset (grey) with ground, 10 ft (3 m)
Cord Cover:	Grey, 6 ft (1.8 m) long, optional
Warranty:	1 year